Preserve

App. F. IX-4

Previous References 1935-36. (R.A.)

File No. 7-35

Serial Nos. 163.

Later References.
R.A. 7-35 Sls. 4,5,6,7&8.
" 36-35 " 1, 13 July 1936.

GENERAL AND REVENUE SECRETARIAT.

Serial Nos. Three.

P.39/E

Part B for September 1935.

SUBJECT.

Construction of Kitchens and bath rooms in the compound of the Marimallappa's High School, Mysore

Sl: 3. To the Chief Engineer, the Supdg. Engr., Mysore Circle, Dr. of P.?., Secy., R.A. & H.C. and Comptroller. No. RL 91-95/ dated 6th September 1935.

WD 01965—GPB—15,000—7-7-34

Accords sanction to the estimate amounting to Rs. 3,350/- for the construction of Kitchens and Bath rooms for the use of the Members of the Representative Assembly.

BB 12/9/35.

Improvements in the Marimallapa's High School for the convenience of the R.A. Members.

File Re—Construction of Kitchens and bath rooms.

General and Revenue Secretariat. [App. F. III-2

R.A. File No. 7 of 1935.

The Chief Secretary and the Secretary Representative Assembly inspected this morning the several building occupied by members of the Representative Assembly and the followinf were the decisions come to.

1. R.A. Home:- The coat stands in the bath rooms may be got fixed early. Phynyle should be used more freely in the morning.

File relating to Construction of bath rooms & Kitchens.

2. H.B. Chattram:- The Chattram authorities should be requested to put up few flush latrines.

3. M. M. High School:- Permanent structures should be putnup for kitchens and bath rooms probably 4 kitchens of ~~12xxXxx12~~ 12 ' x 12' and six bathing rooms of 11" x 8" may be enough.

2. The question of having an independent staircase for the room in the 2nd floor instead of the present one from the room in the first floor may be investigated. Perhaps it would be possible to give an independent staircase by using the existing materials of the present stair case.

3. For the windows in each room expanded metal with square meshes, or wire gauze, shutters in frames should be got made and screwed at the time of ta ing up the building before occupation by members. They should for part of the furniture of R.A. It would be desirable. perhaps, to get this done by the Special Duty Officer, early.

4. The rooms in the buildings should be got whitewashed before they are occupied.

5. The three urinals in the eastern half of the latrines may be converted into closets.(with Hindustani closets) and the urinals thus released may be put near the main building itself so that they may be

NOTE—Contn. Sheet.

made use of during nights and rainy days.

6. Two wicket gates one on the eastern and another on the western compound walls may be got opened. (there was one on the western side and it was removed.)

7 The water from the kitchen and bathing rooms and tap should be drained properly.

8 The flooring of the rooms has to be improved.

9 After perusal action will be taken on each item seperately

Intd/- C.S.S 18.6.35

10 Chief Secy thro' Secy R.A & L.C

11 An estimate may be proposed for several items of work. These improvements seem to be very necessary for the comfort and the convenience of the members.

Intd. C.S. 19.6.35

Chief Secy ~~XXXx~~)

(Urgent) 12 Please write to the P.W.D. Get instructions. As regards action to be taken by the S.D.O please note what it will cost. I would like a stt. to be prepared showing existing expr. on sheds.

Intd. K.V.A 19.6.35

13 Refce. Para 13 of notes ante. It costs on an average Rs. 435 every year including both the Birthday and Dasara Sessions of R.A. on account of kitchen sheds in the Marimalla pa's High School.

14 The file linked hereto indicates action taken to construct permanent kitchens.

S.K.
27.6.35.

15 The Asst Engr. whom I reminded yestarday for replies said that he would be able to send a reply only in the first week of July as he is very busy just now, this being the end of the Official year File will be resubmitted on receipt of replies.

Intd/- C.S.S. 27.6.35

16 Secry. R.A. | Intd/-C.S
Chief Secy. |

17 Yes. Please put up on 15.7.35

Intd/- K.V.A 1.7.35

Files are bei
p seperately
following cas
1. Latrines.
2. Kitchen and
3. Window cov
4. Wicket gat

R.No 7-35T

G.E. 97.34.1

Special Duty Section

24/10/34

ఘన/ప. మైసూరు రాజ్య సేవలో ఆనరబుల్ అసెంబ్లీ సెక్రటరీ అయ్యవారు,
బెంగుళూరు. వెస్టర్న్ సర్కిల్.

మైసూరు సంస్థానపు ప్రభుత్వపు సేవకై ఇక్కడ నుండి ఆదేశాలు అనుసరించి పంపబడిన ఉద్యోగస్థుల జీతాలు మొదలగు ఖర్చులు తిరిగి అందజేయడానికి.

1. ఈ సంస్థానపు ప్రభుత్వపు సేవకై ఇక్కడ నుండి పంపబడిన ఉద్యోగస్థులకు ప్రయాణ ఖర్చులు మొదలగు వాటి వివరాలు ఇక్కడ నుండి పంపిన వెంటనే ఇవ్వడం జరుగుతుంది, మళ్ళీ వారు ఇక్కడకు వచ్చినప్పుడు ఇవ్వడానికి వీలుగా ఉండదు.

2. కొన్ని రూపాయలు మళ్ళీ తిరిగి వచ్చిన తరువాత ఇవ్వడానికి ప్రయత్నించడం జరుగుతుంది. ఈ ప్రయత్నించడానికి ఇక్కడ నుండి వెళ్ళిన ఉద్యోగస్థుల వివరాలు అనగా పేరు, హోదా, వయస్సు, జీతం, ఎప్పుడు వెళ్ళినది, ఎప్పుడు తిరిగి వచ్చినది మొదలగు వివరాలు అవసరం.

3. ఇక్కడ నుండి వెళ్ళిన ఉద్యోగస్థులు వారి కుటుంబ సభ్యులను తీసుకొని వెళ్ళినట్లయితే వారి కుటుంబ సభ్యులకు ఇవ్వవలసిన ఖర్చులు ఇవ్వడానికి వీలుగా వారి కుటుంబ సభ్యుల వివరాలు అనగా పేరు, వయస్సు, వారు ఉద్యోగస్థునికి ఏమవుతారు మొదలగు వివరాలు అవసరం. వారు ఎప్పుడు తిరిగి వచ్చినది కూడా తెలియజేయవలెను.

4. ఇక్కడ నుండి వెళ్ళిన ఉద్యోగస్థులు తిరిగి వచ్చిన తరువాత ఇవ్వవలసిన ఖర్చులు ఇవ్వడం వీలుగా అవసరమైన వివరాలు

ఈ అవసరమైన వివరాలు మళ్ళీ మళ్ళీ అడుగుటలో అసెంబ్లీ సిబ్బందికి ఇబ్బంది కలుగుచున్నందున దయచేసి ఈ వివరాలు ఒకేసారి పంపవలసిందిగా కోరుచున్నాము.

విశ్వాసపాత్రులు,
కార్యదర్శి,
M. Ahmbe Gowda
M. అంబే గౌడ
S.C. Branch

బెంగుళూరు.
22.10.34.

R.A 7-35

4. B. Chandrababu

K. B. Sri Rama Reddy

S. Jaipal Reddy

J. Sudarsana Reddy

P. Chalapathi Rao

2757/6

General and Revenue Secretariat

File No. 9D 855 of 1934-35

[App. F. III–2

Serial No.

1 No. 1663 Z. 28.3.35 from the Asst. Engineer, 66 Quarters Raufe, Mysore forwards an Estimate for constructing a permanent Kitchen + Bath room in the M.C.C. & School's Compound for use of R. A Members during their sessions.

Subst for order, with reference to the request of Certain R.A Members in the Petition attached. Whether funds can be made available, and whether this D.P.I has to be consulted are among the points for consideration.

If may be sent to R A Secy for orders.

8/4 Chr

Secy, R.A) 8/4

2/ Subst. No funds are available under the R.A. grants to meet this expenditure. For orders.

BVRN 22/4 In case the proposed construction of a Kitchen and a bath room is necessary, the Ch. Engineer may be consulted as to whether funds could be made available for the purpose from the P.W.D. budget.

8.4.35

8/4 Secy) 23 Ce 8/4

By Asst Secy. to P.W. Budget

NOTE—Contn. Sheet

W. 8/4/35

61 2751/0 1891

File No. 9 Genl - 6 of 193 6.

General and Revenue Secretariat

Cannot take this work in this year and open Office Year, as this limited Estimate is for Repairs. The kitchen & bath rooms are necessary. May however be forwarded W.O to the Ch. Engineer for opinion. If forwarded with Compliments to the Chief Engineer for favour of opinion where funds could be made available during the next Year. B.O.

C.S. Ramaswamy Iyer 31.5.35. for Chief Secy.

W.O. 20. 475 dt. 18.6.35.

Returned with compliments.

2. It is not possible to meet the cost of this work out of the grants of the Public Works Department as the grant for next year under "24 Civil Works, Civil Buildings" is inadequate to meet the cost of several urgent works postponed during the current year.

3. The Education Department may perhaps be consulted whether funds could be made available from the Education Budget.

17/6/35.

Chief Engineer of Mysore.

B.N.H. [illegible] will please bring [illegible] on the [illegible]

W.O. No. 23-34 Dated 1.6.35

W.O. 7555 - dt. 6.35.

Secretariat

4/6/35

Construction of Kitchens & bath rooms in Maruvallappa's High School

General and Revenue Secretariat. File No. 977 Component of 1936 [App. F. III-2

2) Draft to the Asst Exec Hd & Range to send an estimate for Constructing 4 Kitchens of 12' X 10' & 6 bathing rooms of 10' X 8' is submitted as directed

Sd 15/6/35 — Sd. Illegible 19/6.

1 Letter No 365 dt 16.6.1935 from the Asst Engr. 2nd quarter Range, Mysore forwarding plans and estimates for the Construction of Kitchens and bath rooms in Maruvallappas High School.

3) The estimate is for the Construction of 4 independent Kitchens & 6 bath rooms The cost of Construction of these is estimated to amount to Rs 3350. Each Kitchen measuring 10'x12' & each bath room 10x8' in two separate blocks.

3) The original estimate for the Construction of a Kitchen 10x12, a dining Hall 10x20 and a bath room 10x15 was Rs 2.200 (vide estimate received from the Asst Engineer with letter No. 1663 dt 28.3.35).

3) It is a point for consideration whether funds can be found for this purpose and who should bear the cost. The R.A. office & the Chief Engineer who were consulted in the matter have both stated that no funds can be made available out of their grants.

1 vide paras 3 & 9 of the notes supra

NOTE—Contn. Sheet.

p.70

Construction of Kitchen & bath rooms in Mariamallapuram High School,

576

File No. 7 D855 of 193

General and Revenue Secretariat

P.W.D

7) It is further stated by the Asst. Engr. that a desire has been expressed by the D.P.I. to Construct the kitchens in such a manner to hold at least 2 classes on other occasions for want of sufficient accommodation at present. As in this way the building will also be availed of by the Education Dept. during the major portion of the year it is also a point for consideration if the D.P.I may be consulted in the matter or not.

8) The Asst Engineer wants to intimate him if the work has to be carried out before the forthcoming occasion. The need for this is also felt by the R.A. members.

9) Submitted for orders with reference to paras 11 & 13 supra.

17.8.35

10) The Estimate for 4 Kitchen & bath Room is Rs 3350. The P.W.D. has said that there are no funds available with them. The Cost will have to be met by the Edn Dept & the R.A. perhaps in equal proportions. We are spending from R.A funds on an average Rs. 435 per Year on temporary sheds in the Schools.

Orders.

Chief Engr
Secy R.A)

17/8

Construction of Kitchens & Bathrooms in Marimallappa's High School

General and Revenue Secretariat. | R.A File No. 7 4855 of 1935. | [App. F. III-2

36
21) The Kitchens to be built are proposed to be utilised for holding the classes of the Marimallappa's High School during the off season of the Assembly and thereafter used by the R.A. members will be only for about a fortnight during the year. The expenditure in question seems to be a legitimate charge in the budget of the Education Debt. The D.P.I. may perhaps be consulted in the matter. ~~The question may be decided as to whether the provision of the kitchens is necessary for the Assembly~~. There are no funds in the R.A. budget to meet this expenditure.

19/8/35

39/22) The school authorities want more accommodation. The D.P.I might be consulted. The R.A may contribute a portion of the expenditure.

Chief Secretary

D.P.I 40/23) 7/8/35

40/24) Even when permanent structures are constructed it would be necessary for us to put up some temporary sheds for the use of Mahomedan & depressed class students who are accommodated in the School. We like may perhaps be sent up to the D.P.I.

By
Secy, R.A) 21/8/35

4 21/8

20 AUG. 1935

NOTE—Contn. Sheet.

Construction of Kitchen & bath rooms in Marimallappa's High School.

676/0

G.A. File No. 7 of 1935. General and Revenue Secretariat

G.O. No. 4 of 1935-36 dated 21.8.35

(1) Forwarded with compliments to the Director of Public Instruction for favour of opinion.

By order.

C. V. Srinivasa Char.

for Chief Secretary to Govt.

21-8-35.

(2) Returned with compliments. The sketch is forwarded to the Institute Specially for R. A. purposes. As it is proposed that all the rooms were made similar hence the proposed thing could be used for class purposes. That does not make the Committee's proposal change in the Govt. order. Condition wise the Govt. approved such proposal of the Govt as will not be incurred otherwise, if the rooms are made to suit our purpose also. Extra cost due to the width of the rooms being increased. Otherwise it does not put any extra burden to Govt. for a change or other item.

K. S. Subba Rao D.P.I.

23/8/35

G.O. No. 10 dated 23-8-35

Govt. 23 Aug 1935

D227

Construction of Kitchens & bath rooms in Manimallappais High School.

General and Revenue Secretariat. | File No. 7 of 1935. | [App. F. III-2

46 28) Submitted with reference to para. 47 24 supra. From the opinion expressed by the D.P.I. it does not seem that he is in favour of apportioning any amount from his departmental budget for the additional structure as at present proposed in as much as it is stated that, in case the width of the rooms are increased and the structure is to suit the convenience of the school, the extra cost, if any, likely to be incurred on this account would be learnt by his department with the approval of Government.

47 29) The total cost of the present structure is estimated to be Rs 3350/-. Submd for orders.

DS 26.8.35.

46 Ley RA 26/8

46 30) According to the proposal the Assistant Engineer, Shiyaly, the kitchen will be so constructed as to be useful for 2 class rooms during the off seasons i.e. he puts on Tin sheet partitions between 2 kitchens. As regards the ~~existing~~ kitchens, ~~and bathrooms~~ ~~could be~~ ~~converted into class rooms~~ ~~after~~ ~~the~~ ~~new~~ ~~kitchens~~ ~~are~~ ~~completed~~ the rooms to be built for use as kitchen during the season

R.A

NOTE—Contn. Sheet.

10 Construction of Kitchen 676
12 & bath rooms in Mari mallappa's School.

1 f File No. 7 D855 of 1935.

General and Revenue Secretariat

DEWAN'S OFFICE
28 AUG. 1935
No. ...

with the cost of the years be used as class rooms, the Education Dept may bear the cost of their construction. This will come to about Rs 1800. The cost of construction of the bath rooms which will come up to about Rs 1750 may be borne by the R.A.

Chief Secretary) C
27/8/35
by

50 The Education Secretary suggestion may be agreed

Hon'ble Dewan
Hle
27.8.35
by

51 JS
28/8

52 Hle
28/8/35
by

53 MS
28-8-35

54 HC
29/8

55 Subject The file may now be sent to R.A. office for taking necessary further action

56 Yes
29/8

57 HS
30-8-35

58 R. Appaji (W. C.
DL
30/8/35

D-855

13

File re Construction of Kitchens & bathrooms in Marimallappa's High School.

General and Revenue Secretariat.

[App. F. III-2

RA File No. 7 of 1935.

SE. 1935 2

5/ Submitted with a draft Govt order Sanctioning the estimate, as per orders above. As the Grants under "R.A. Miscellaneous" is very limited, it is very likely that the remaining grant will not be sufficient to meet the demand for the remaining portion of the year and an additional grant may be found to be necessary. For orders

BVN
31-8-35

"For favour of speedy issue

6/7/8/35

4/9

3. To. The Chief Engineer in Mysore.

" Superintending Engineer Mysore Circle with the plans and estimates

" Director of Public Instructions in Mysore.

" Secretary Rep. Assembly and Legis. Council.

" Comptroller to Government.

Copy to the S/pl. Duty Officer and Education Branch.

No RL 91-95/R.A. 296 Dated 6-9-1935.

Sanctions the estimate amounting to Rs 3,350/- for the Construction of 4 Kitchens and 6 bathrooms in the Compound of the Marimallappa's High School, the cost of the bath rooms estimated at Rs 1750 being debited to the head "Miscellaneous - Rep Assembly" under 12 General Administration, 3. Rep Assembly and

NOTE—Contn. Sheet.

E

R.A File No. 7 D855/R.A. of 1935. | General and Revenue Secretariat

Legislative Council" in the current year's budget, and directs the Director of Public Instruction to point out direct to the Comptroller the source from which the expenditure for construction of kitchens, amounting to Rs. 1600, should be met for reasons explained.

No. RL 97/R.A. Dated 6-9-1935.

Copy to the Assistant Engineer Head Quarter Range Mysore.

B

OFFICE OF THE SECRETARY.
12 SEP. 1935
REPRESENTATIVE ASSEMBLY
AND
LEGISLATIVE COUNCIL.

GOVERNMENT OF HIS HIGHNESS THE MAHARAJA OF MYSORE

General and Revenue Secretariat

No. 387 / G.E. 97. 34-4 Dated, Bangalore, 19th June 1935

H

From

The Registrar,
General and Revenue Secretariat,
Bangalore.

To

The Assistant Engineer,
Head Quarter Range, Mysore.

Sir,

With reference to your letter No.1663 dated the 28th March 1935, I am directed to request you to kindly send an estimate for constructing 4 kitchens of 12' x 10' in one block and 6 bathing rooms of 10' x 8' in another block in the Marimallappa's High School Compound, Mysore. The matter may kindly be treated as urgent

I have the honor to be,
Sir,
Your most obedient servant,

Registrar.

KNN2

No. 1663 Enc. Est 1 with abstract **MEMORANDUM.** G.E. 97 34-2 2757/16 2 0 R.#7554

From Dept 2 Item 1.

The Assistant Engineer,
Head Quarter Range,
MYSORE.

To

The Registrar,
General and Revenue Secretariat,
Bangalore.

Dated 28th March 1935.

Sir,

Estimate for constructing Kitchen and Bath room in Marimallappa's High School compound for Rs 2200/- as per personal requisition of the Camp Officer.

***

I have the honor to forward herewith a plan and estimate for the above work for favour of getting it countersigned by the Chief Secretary & early return.

The source of meeting the cost may kindly be pointed out. Work can be undertaken only next year after estimate is received sanctiond & funds are alloted.

I have the honor to be,
Sir,
Your most obedient servant,
Ramaraeeu
Assistant Engineer, 283
Head Quarter Range.

HMK.

Report to accompany the estimate for construct-ing Outhouse block in the Compound of Marimallappa's High School Mysore.

****

At each session of the Assembly in October & June, temporary erection is being made for Kitchen & Bath Rooms for the Members who are accomodated in Marimallappa's High School.

It was suggested that a proposal for a permanent structure may be put up. Hence the enclosed estimate with plan is got up.

The block contains a kitchen room (10 X 12), a dining hall (10 X 20) and a bath room (10 X 15) The walls are with brick in clay plastered over with chunnam mortar. The wood work is of teak wood includ-ing doors and windows. 1st class Mangalore tiled roofing on teak reapers is proposed to be put up. Necesaary water connection and Electric fittings are also proposed.

The cost of the estimate is Rs 2,200

with the current rates.

Assistant Engineer,

Head Quarter Range.

Report to accompany the estimate for construct-
-ing Outhouse block in the Compound of Marimallappa's
High School Mysore.

****

At each session of the Assembly in October &
June, temporary erection is being made for Kitchen &
Bath rooms for the Members who are accomodated in
Marimallappa's High School.

It was suggested that a proposal for a permane
structure may be put up. Hence the enclosed estimate
with plan is got up.

The block contains a Kitchen room (10 X 12),
a dining hall (10 X 20) and a bath room (10 X 15
The walls are with brick in clay plastered over with
chunnam mortar. The wood work is of teak wood inclu
-ing doors and windows. 1st class Mangalore tiled
roofing on teak reapers is proposed to be put up.
Necesaary water connection and Electric fittings are
also proposed.

The cost of the estimate is Rs 2200/-

2d

with the current rates.

Assistant Engineer,

Head Quarter Range.

HMK.

Head Quarter Range, Mysore

Detail Estimate for the proposed Kitchen and Bath Room attached to Manimallappa's High School, Mysore. 2/

No.	Brought forward ...	No.	L.	B.	D.	Contents	Total
	Excavating Earthwork foundation and filling in basement.						
	Longitudinal walls.	2	52 1/8	2 1/2	3	782	
	End cross walls	2	8 5/8	2 1/2	3	129	
	Partition walls.	2	8 5/8	2	3	112	
	Bath room longitudinal walls	1	14 1/4	1 1/2	1	21	
	partitions	2	5 1/16	1 1/2	1	16	
	for steps	3	3 1/2	2	1	21	
	Total					1081	or 40 cyds
2.	Jelly Concrete in chunam mortar						
	Longitudinal walls.	2	52 1/8	2 1/2	1	260	
	End and cross walls.	2	8 5/8	2 1/2	1	43	
	Partition walls.	2	8 5/8	2	1	36	
	At bath room. longtl wall.	1	14 1/4	1 1/2	1/2	11	
	Partitions	2	4 1/2	1 1/2	1/2	7	
	Bath room walls	3	5	4 1/2	1/4	17	
	Steps	3	3 1/2	3	1/2	16	
				Total -		390	cft. 340
	Brick in Chunam mortar in foundation.						
	Longl. wall	2	51 1/2	1 7/8	2	386	
	Partitions	2	4 1/2	1 1/2	1/2	7	
	Bath room walls	3	5	4 1/2	1/4	17	
	Steps	3	3 1/2	3	1/2	46	
	Carried over ...			Total -		~~390~~ 519.	cft. 390

WD 01201—GPB—5,000—18-2-3

No.	Brought forward ...	No.	L.	B.	D.	Contents	Total
	B. F.					519	
	Partition walls.	2	4½	1⅛	½	5	
			Total in cft			524	cft
	Brick in mortar in Basement.						
	Longitudinal walls.	2	51⅛	1½	1½	230	
	End and Cross walls.	2	9⅝	1½	1½	44	
	Partition walls	2	9⅝	1⅛	1½	33	
	At bath room.	1	14⅛	1⅛	½	8	
	partition wall.	2	4⅞	1⅛	½	5	
	Steps	3x1	3	1	½	5	
			Total			325	
	Deduct for:						
	Sill. slabs of doors.	3	4½	1½	½	10	
	do	2	4½	1⅛	½	5	
			Total cft			15	
	Balance of brick in clay in cft					310	
	Brick in clay in Superstructure.						
	Longitudinal walls.	2	50¾	1⅛	8½	971	
	End & Cross walls.	2	10	1⅛	8½	191	
	Gables	2	12¼/2	1⅛	4½	55	
	partition walls.	2	10	¾	8½	128	
	Gables.	2	12¼/2	¾	4½	37	
			Total			1382	
	Deduct for:						
	Lintels of doors	3	5	1⅛	½	9	
	do	2	5	¾	½	4	
					Total	13	

Carried over ....

C.

Brought forward ...	No.	L.	B.	D.	Contents	Total
B. F. Deductions continued.					13.	
Sills and Lintels of windows.	2x4	5	1 1/8	1/2	23.	
			Total -		36.	
— do — of ventilators.	2x12	5	1 1/8	1/2	68.	
		Total in cft -			104.	
Balance bt brick in clay Superstructure (1382-104).					1278	
bt Brick in chunam mortar						
Sides of doors -	3x2	6 1/2	1 1/8	1	44	
— do —	2x2	6 1/2	3/4	1	20	
windows.	4x2	4	1 1/8	1	54	
Ventilators.	12x2	1 3/4	1 1/8	1	47	
bt wall plate position.	2	50 3/4	1 1/8	1	126	
Gables.	2x2	7	1 1/8	1	32	
— do —	2x2	7	3/4	1	21	
		Total in cft			344	cft 344.
Bt brick in chunam mortar mixed with cement.						
Cross walls of Bath.	1	15	3/4	1	11	
— do —	2	5 1/4	3/4	5	39	
		Total -			50	cft 50
Bt stone slabs 5" to 6" Thick including fixing :-						
Sills of doors.	3	4 1/2	1 1/2	(6")	20	
— do —	2	4 1/2	1 1/8	(6")	10	
Lintels of doors.	3	5	1 1/8	(6")	17	
					Total. 47	

Carried over ...

WD 01201—GPB—5,000—18·2·32

	Brought forward ...	No.	L	B.	D.	Contents	Total
	B.F.					47	
	Lintels of doors.	2	5	3/4	(6")	8.	
	Sills & Lintels of windows.	2x4	5	1 1/8	(6")	68	
	" — do — Ventilators.	2x12	5	1 1/8	(6")	135	
	Slips	3x2	3	(1 1/8 + 1)/2	(6")	19	
	Sink in Kitchen -	1	4	3	-	12	
	Bath -	3	5 1/4	4 1/2	-	71	
				Total	—	360	Sft 360.
8	J.W. doors with frame & battened shutters, hinges etc with necessary fixtures etc complete.	5	3	-	6 1/2	·98	Sft · 9.8
9	J.W. windows with frame and battened shutters & iron bars etc complete.	4	3	-	4	48	Sft · 48
10	J.W. Ventilators of J.W. frame and expanded metal	12	3 1/2	-	1 3/4	74	Sft · 74
11	J.W. wrought and fixed up including wood oiling						
	Wall plates	2	50 3/4	3"	2"	4.25	
	Rafters	2x21	9 1/2	2 1/2"	3 1/2"	24.25	
	Collars	21	6 1/2	2 1/2"	3 1/2"	8.30	
				Total.		36.80	Cft 36.8
12	Roofing with 1st class marsalore tiles on 2"x1"					-	
	teak rafters etc complete	2	53 3/4	9 1/2	-	10.21	Sqr 10.2
	Carried over						
13.	Ridge tiles set in mortar	1	53 3/4	-	-	54	Rft 54.

WD 01201—GPB—5,000—18-2-32

No.	Brought forward ...	No.	L	B.	D.	Contents	Total
14	Providing Smoke tiles					—	
	In Kitchen.	12	—	—	—	12	
	In Bath.	4	—	—	—	4	
			Total		No.	16	No. 16.
15	Plastering with Chunam mortar.						
	Inside Kitchen.	1	44	—	9	396	
	Dining hall.	1	60	—	9	540	
	Bath.	1	50	—	9	450	
	Gables.	6	19/2	—	3 1/3	100	
	Exterior:- Longl. walls.	2	50 3/4	—	8	812	
	Cross walls.	2	12 1/4	—	8	196	
	Gables	2	12 1/4 / 2	—	4 1/2	50	
	Basement.	2	51 1/8	—	1 1/2	153	
		2	12 5/8	—	1 1/2	38	
	Steps	L.S.				35	
			Total			27·70.	
	Deduct for:-						
	Doors.	5	3	—	6 1/2	98	
	windows.	4	3	—	4	48	
	Ventilators.	12	3 1/2	—	1 3/4	74	
			Total			2·20	
	Balance plastering in Sqrs.					25·50	Sqr. 25·50.
16	White washing 2 coats as per plastering area.					25·50	Sqr. 25·50
	Carried over						

	Brought forward ...	No.	L.	B.	D.	Contents	Total
17	Flooring with 3" jelly Concrete in chunam mortar and plastering with ½" cement plaster						
	Kitchen.	1	12 ¼	10 ¼	-	126	
	Dining.	1	20 ¼	10 ¼	-	208	
	Bath.	1	15 ¼	5 ¼	-	80	
			Total			414	Sqr. 4. 14.
18	painting with chacolate.						
	Doors.	2¼ x 5	3	-	6½	221	
	windows.	2¼ x 4	3	-	4	108	
	Ventilators.	1½ x 12	3½	-	1¾	111	
			Total	—		440	Sqr. 4. 4.0
19	Providing J.W. eave board plain 6" including painting	2	53 ¾	-	-	108	
	Gables	2 x 2	9½	-	-	38.	
			Total	-		146.	Rft. 146.
20	Providing and fixing Shelf boards with necessary fixtures in Kitchen room	2	10	(1¼)		20.	
		1	5	(1¼)		5	
	Bath room	2	4	(1¼)		8	
			Total	-		33.	Rft. 33.
21	Providing and fixing wall plugs & hinges.						
	Kitchen - Carried over ...	3	-	-	-	3	

WD 01201—GPB—5,000—18-2-32

	Brought forward ...	No.	L	B.	D.	Contents	Total
21	B. F.					3-	
	(Kitchen) Dining	12	-	-	-	12	
	Bath.	6	-	-	-	6	
				Total	-	21	
22	Providing a sink with lead off pipe and an oven in the Kitchen.	L.S.			Rs.	10:	
23.	Providing an oven in Bath and pipes to sinks.		L.S.		Rs	15-	
24 a.	Pointing with cement mortar:—Slabs at the sink	3	4½	5¼	-	81	Sqr. 0-81
b)	Providing mortar bands	2x2	9½	-	-	38	Rft-38 -
25-	Unforeseen works etc.	L.S.					
26	Pipes connection etc.						
27	Electric fittings etc.						

Assistant Engineer
28/3
Asst. Engineer
Head Quarter Range
27.3.36 Mysore.

Carried
25.3.36.

Carried over

P. W. Genl. 80.] DIVISION

PUBLIC WORKS DEPARTMENT.

Abstract estimate for the proposed kitchen and Bath Room attached to the Harimallappa's High School, Mysore

No.	Items of work	Unit	Rate Rs.	Rate a.	Rate p	Quantity	Cost
1.	Excavating earth for foundation & filling in basement	c.yd	.	4	.	40	10
2.	Stone jelly concrete in chunam mortar	c.ft	.	3	3	390	79
3.	Brick in chunam mortar in foundation.	c.ft	.	4	3	524	139
4a.	Brick in ~~clay~~ mortar. basement.	c.ft	.	3 4/8	3	310	~~63 83~~
4b.	Brick in clay. Superstructure.	c.ft	.	3	3	1278	260
5.	Brick in chunam mortar for sides of doors and windows.	c.ft	.	4	3	344	91
6.	Burnt brick in chunam mortar mixed with cement.	c.ft	.	6	.	50	19
7.	Burnt Stone slab 6" thick.	s.ft	.	7	6	360	169
8.	Teakwood doors with battened shutters and necessary fixtures etc complete.,	s.ft	1,	6	.	98	135
9.	Teakwood windows with battened shutters with 3/4" iron bars and necessary fixtures etc complete.	s.ft	1	8	.	48	72.
10.	Teakwood Ventilators with frame and expanded metal	s.ft	.	14	.	74	65

Carried over ....

No.	Brought Forward ...	Unit	Rs.	a.	p	Quantity	Cost
11.	Teakwood wrought and put up						
	including woodoiling.	c.ft	4	8	.	36.8	166
12	Roofing with 1st class mangalore tiles on 2" x 1" teak reafers	Sqr	28	2	.	10.21	287
13.	Ridge tiles set in mortar.	Rft	.	9	6	54	32
14	Providing Smoke tiles.	No	1	6	6	16	23
15	Plastering with chunam mortar	Sqr	3	4	.	25.5	83
16	whitewashing 2 coats.	Sqr	.	4	.	25.5	6
17.	Flooring with 3" of jelly concrete						
	in chunam mortar and plas-						
	tering with ½" cement plaster	Sqr	13	.	.	4.14	54
18	Painting with chocolate two						
	coats.	Sqr	2	13	.	4.40	13
19.	Providing Teakwood Eaveboards						
	plain 6" including painting.	R.ft	.	8	.	146	73
20	Providing and fixing wall shelf boards with necessary fixtures.	Rft	1	.	.	33	33
21	Providing and fixing wallplugs						
	and hinges.	No	.	8	.	21	11
22.	Providing and a sink with lead						
	off pipe and an oven in the						
	Kitchen	Ls					10
	Providing an oven in the bath						
	room and pipes to sink	Ls					15

WD 0821—GPB—5,000—1-12 33

WD 0822—GPB—10,000—23-12-33

o.	Brought forward ...	Unit	Rs.	a.	p.	Quanitity	Cost
	Painting the with cement-						
	mortar the slabs at the						
	sink	Sqr	4			0.54	2.
4b.	Providing and mortar bands	Rft		4		38	10
25.	unforseen works etc.						30
26.	Pipe connections etc.						50
27.	Electric fittings etc,						80
							100
		Total					2,100
	Contingencies.						100
	Grand Total.						Rs 2,200/-

R James & Co 28/3
Assistant Engineer.
Head Quarters Range, Mysore

27/3/35

Carried over ...

Proposed Kitchen

Marimallappa

SCALE 8

Plan

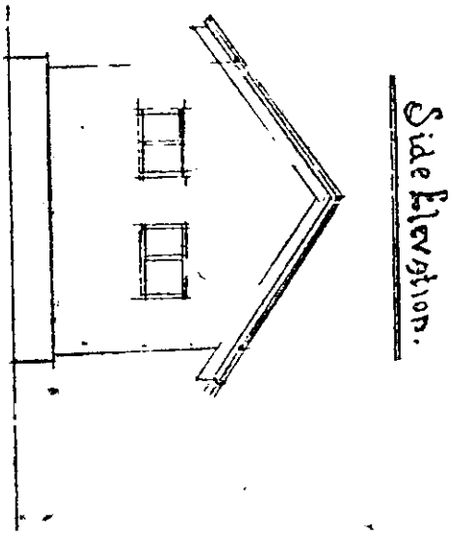

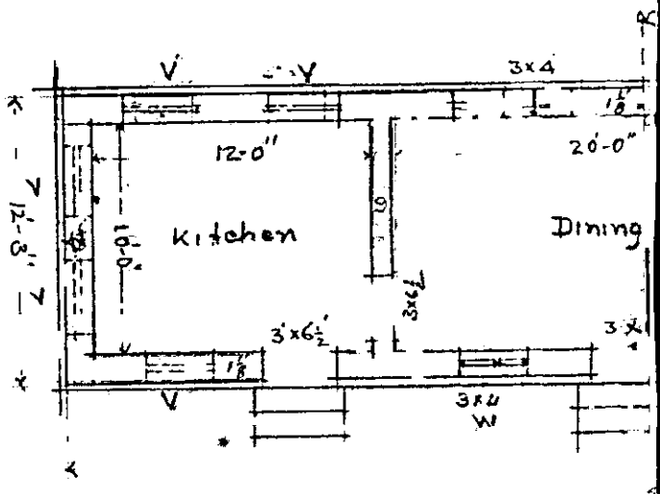

Front El

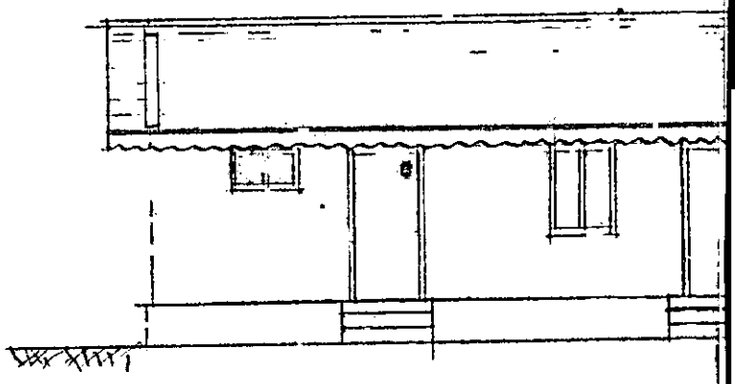

hd Bath Room To
s HighSchool

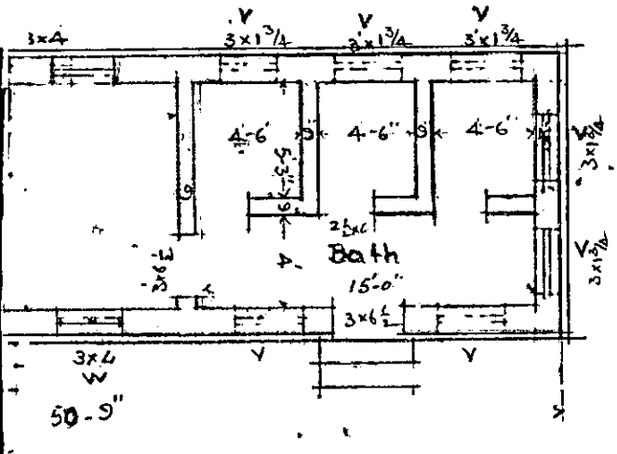

Section on A B

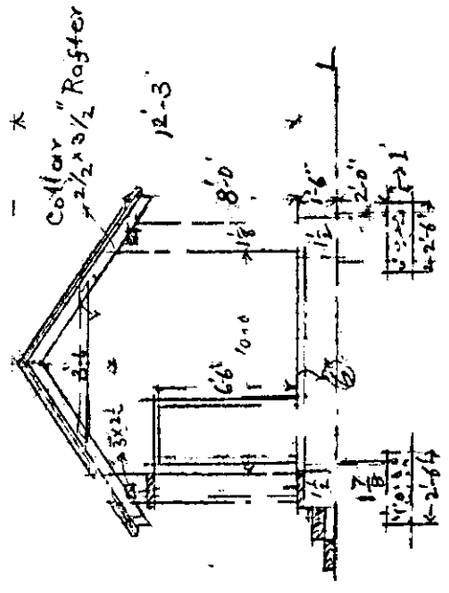

vation

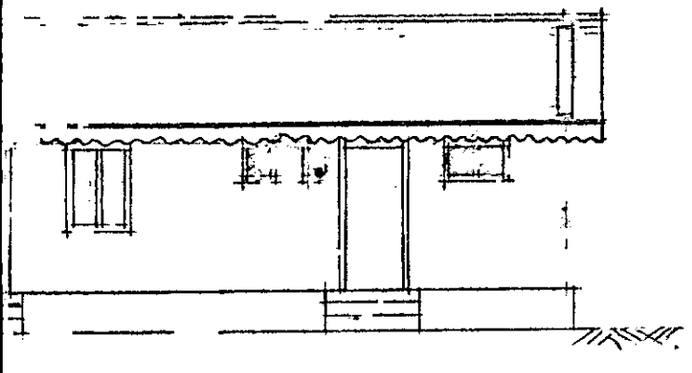

Mysore 28/3

Assistant Engineer
Head Quarter Range
Mysore

28/3/35

676
6 32

No.....365

Enc. Estimate 1 of 8 pages.
Plan & details of sill } with report - 1 in triplicate
4

OFFICE OF THE ASSISTANT ENGINEER,
HEAD QUARTER RANGE.
Mysore, Dated...16:...8:.....1935.

R-A 7-35

FROM

THE ASSISTANT ENGINEER,

Head Quarter Range,

MYSORE.

TO

The Registrar, & Special Duty Officer,

General & Revenue Secretariat,

B A N G A L O R E.

SIR,

RE:- Constructing Kitchens and Bath rooms in Marimallappa's High School, Mysore.

With reference to your letter No. 387 dated 19th June 35 I have the honour to enclose herewith an estimate for the above with plan and report for kind information and retransmission to the Superintending Engineer, Mysore Circle, after countersignature.

During the visit of Director of Public Instruction in Mysore, Bangalore, on 11-8-35, it was suggested that the kitchens may be so built as to be spacious enough to hold atleast 2 classes during the off season of the Assembly as the Institution is feeling it hard for want of sufficient accomodation.

Accordingly in the estimate prepared the cross walls between ~~two windows~~ Kitchens will be replaced by Zinc sheet removable partitions, as during the off season, these can be removed and two kitchens combined to give space for a class room. As this in no way causes any inconvenience, the proposal may be accepted as it serves a double purpose.

There are 4 independent kitchens of 10 x 12 each in one block and 6 bath rooms, 3 in each block, with an independent fire place. The bath arrangement is slightly different from what you proposed and since it will be more convenient, the same will be adopted.

P.T.O.

In the rear two taps are provided to serve as washing places. If work is to be carried out before Dasara, the same may kindly be intimated immediately. Funds required for the work may also be allotted. In this connection I invite your kind reference to this office No. 1663 dated 28.3.35, with which an estimate for the kitchen block had already been sent up.

I have the honour to be,
Sir,

Your most obedient servant,

Assistant Engineer, 16/5

BNM/15-8. Head Quarter Range, Mysore.

R E P O R T.

REF-Requisition made in Special Duty Officer's No. 387 dated 19.6.35

As per above requisition, the present estimate has been got to meet all urgent requirements for the convenience of Representative Assembly Members. Usually temporary sheds were being erected every year and - these being found inconvenient, a permanent structure is proposed now to avoid the recurring expenses.

The front block is meant for kitchens and there are 4 x 10 x 12 independent kitchens for use of - different communities. 6 bath rooms are proposed - 3 in each block in the ~~yard~~ rear.

The construction will be of brick in mortar for basement and 4' above for bath rooms and brick in mud for kitchens. Roofing of Mangalore tiles has been adopted. Mis., items of work such as shelves, etc., are also provided.

Rates proposed are usual.

16/8/35

Assistant Engineer,

Head Quarter Range, Mysore.

35

R E P O R T.

REF-Requisition made in Special Duty Officer's No. 387 dated 19.6.35.

As per above requisition, the present estimate has been got up to meet the all urgent requirements, for the convenience of Representative Assembly Members. Usually temporary sheds were being erected every year and - these being found inconvenient, a permanent structure is proposed now to avoid the recurring expenses.

The front block is meant for kitchens and there are 4 x 10 x 12 independent kitchens for use of - different communities. 6 bath rooms are proposed - 3 in each block in the ~~yard.~~ rear

The construction will be of brick in mortar for basement and 4' above for bath rooms and brick in mud for kitchens. Roofing of Mangalore tiles has been adopted. Mis., items of work such as shelves, etc., are also provided.

Rates proposed are usual.

Assistant Engineer, 16/6/35

BNH/15-8. Head Quarter Range, Mysore.

G.R.S. App. F VI G-2]

36

SUBJECT.....

.....

.....

Diary No. of letter replied to.....

Section R.A.

File No. 7-35

Serial No. 3

General and revenue Secretariat

( )

the 192 .

Proceedings of the Government of His Highness the Maharaja of Mysore.

Date of issue 6th September 1935

Read—

Signed by Hr. G. Sadasivayya

Asst

1) Unofficial Note no 475 Dated 18-6-1935 from the Chief Engineer in Mysore stating that the estimate for the construction of 4 Kitchens and 6 bathrooms as per plans submitted by the Assistant Engineer, Head Quarter range, Mysore, in compound of the Maharajah's High School, amounting to Rs 3350/- cannot be met out of the grants of the Public Works Deptt for reasons stated.

2) Unofficial Note No 411 Dated 21-8-35 from the Director of Public Instruction,

Order Thereon No.

May this be

i Printed ?

ii treated as a standing order ?

iii published in the Gazette, English Part ?

iv translated ?

v placed at the disposal of the press ?

vi published in the Gazette, Kannada Part ?

Expressing his views in the matter.

Order No. ML 91-95 Dt. 6th September 1935.

Government are pleased to sanction the estimate amounting to Rs 3350/- for the Construction of 4 Kitchens and 6 bathrooms in the Maharajah's High School, Mysore for the use of the members of the Rep. Assembly. The cost of constructing the bath rooms which are estimated at Rs 1750/- will be debited to the head "Miscellaneous - Rep Assembly", Under 12 Genl. Admn. S.R.A. H.C. in the Current years budget.

As the rooms to be built for use as kitchens during the Sessions of the Rep. Assembly, could be used as class rooms during the remaining portion of the year ~~by the removal of the Zinc Sheet partitions~~, the Cost of Constructing these rooms estimated to amount to Rs 1600/- will be borne by the Education Deptt. The Director of Public Instruction is requested to point out the source from which this expenditure can be met, direct to the Comptroller.

List of enclosure.

Chief Secy to Govt.

Copied by

BVM. 31.8.35.

Examined by

To. The Chief Engineer in Mysore. 31/8/35

The Superintendening Engineer, Mysore circle with the estimate,

The Director of Public Instruction.

The Secretary. R.A. H.C.

The Comptroller to govt — No. RP. 7 — Dated 6 —

Copy to the Education Branch & to the Spl Duty officer.

WD 0826—GPB—12,500—26-5-27

PROCEEDINGS OF THE GOVERNMENT OF HIS HIGHNESS
THE MAHARAJA OF MYSORE.

R e a d.- (1) Unofficial Note No. 475 dated 18th June 1935 from the Chief Engineer in Mysore stating that the estimate for the construction of 4 kitchens and 6 bathrooms as per plans submitted by the Assistant Engineer, Headquarter Range, Mysore, in the compound of the Marimallappa's High School, amounting to Rs. 3,350/- cannot be met out of the grants of the Public Works Department for reasons stated.

(2) Unofficial Note No. 41 dated 21st August 1935 from the Director of Public Instruction expressing his views in the matter.

O r d e r No. RE91-95/RA7-35-3

Dated Bangalore, the 6th Sept. 1935.

Government are pleased to sanction the estimate amounting to Rs. 3,350/- for the construction of 4 kitchens and 6 bath rooms in the compound of the Marimallappa's High School Mysore, for the use of the members of the Representative Assembly. The cost of constructing the bath rooms which are estimated at Rs. 1,750/- will be debited to the head "Miscellaneous - Representative Assembly", under 12.General Administration, 3. Representative Assembly and Legislative Council in the current year's budget.

As the rooms to be built for use as kitchens during the sessions of the Representative Assembly could be used as as class rooms during the remaining portion of the year, the cost of constructing these rooms estimated to amount to Rs. 1,600/- will be borne by the Education Department. The

The Director of Public Instruction is requested to point out direct to the Comptroller the source from which this expenditure can be met.

For Chief Secretary to Government.

Bam

To

The Chief Engineer in Mysore,

" Superintending Engineer, Mysore Circle, with the estimates.

" Director of Public Instruction in Mysore,

" Secretary, Representative Assembly and Legislative Council,

" Comptroller to Government.